

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 September 2005 (01.09.2005)

PCT

(10) International Publication Number
WO 2005/080021 A1

(51) International Patent Classification⁷: **B21F 23/00**,
B65G 47/14

(74) Agent: **PETRAZ**, Gilberto; GLP Srl, Piazzale Cavedalis,
6/2, I-33100 Udine (IT).

(21) International Application Number:
PCT/IB2004/000894

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 25 March 2004 (25.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
UD2004A000012 23 January 2004 (23.01.2004) IT

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **M.E.P. MACCHINE ELETTRONICHE PIEGATRICI SPA** [IT/IT]; Via Leonardo da Vinci, 20, I-33010 Reana del Rojale (IT).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **DEL FABRO**, Giorgio [IT/IT]; Via Belvedere, 8, I-33019 Tricesimo (IT). **DEL FABRO**, Marcello [IT/IT]; Via Chiavris, 20, I-33010 Tavagnacco (IT).

Published:

— with international search report

[Continued on next page]

(54) Title: FEEDER DEVICE FOR BARS AND RELATIVE FEEDING METHOD

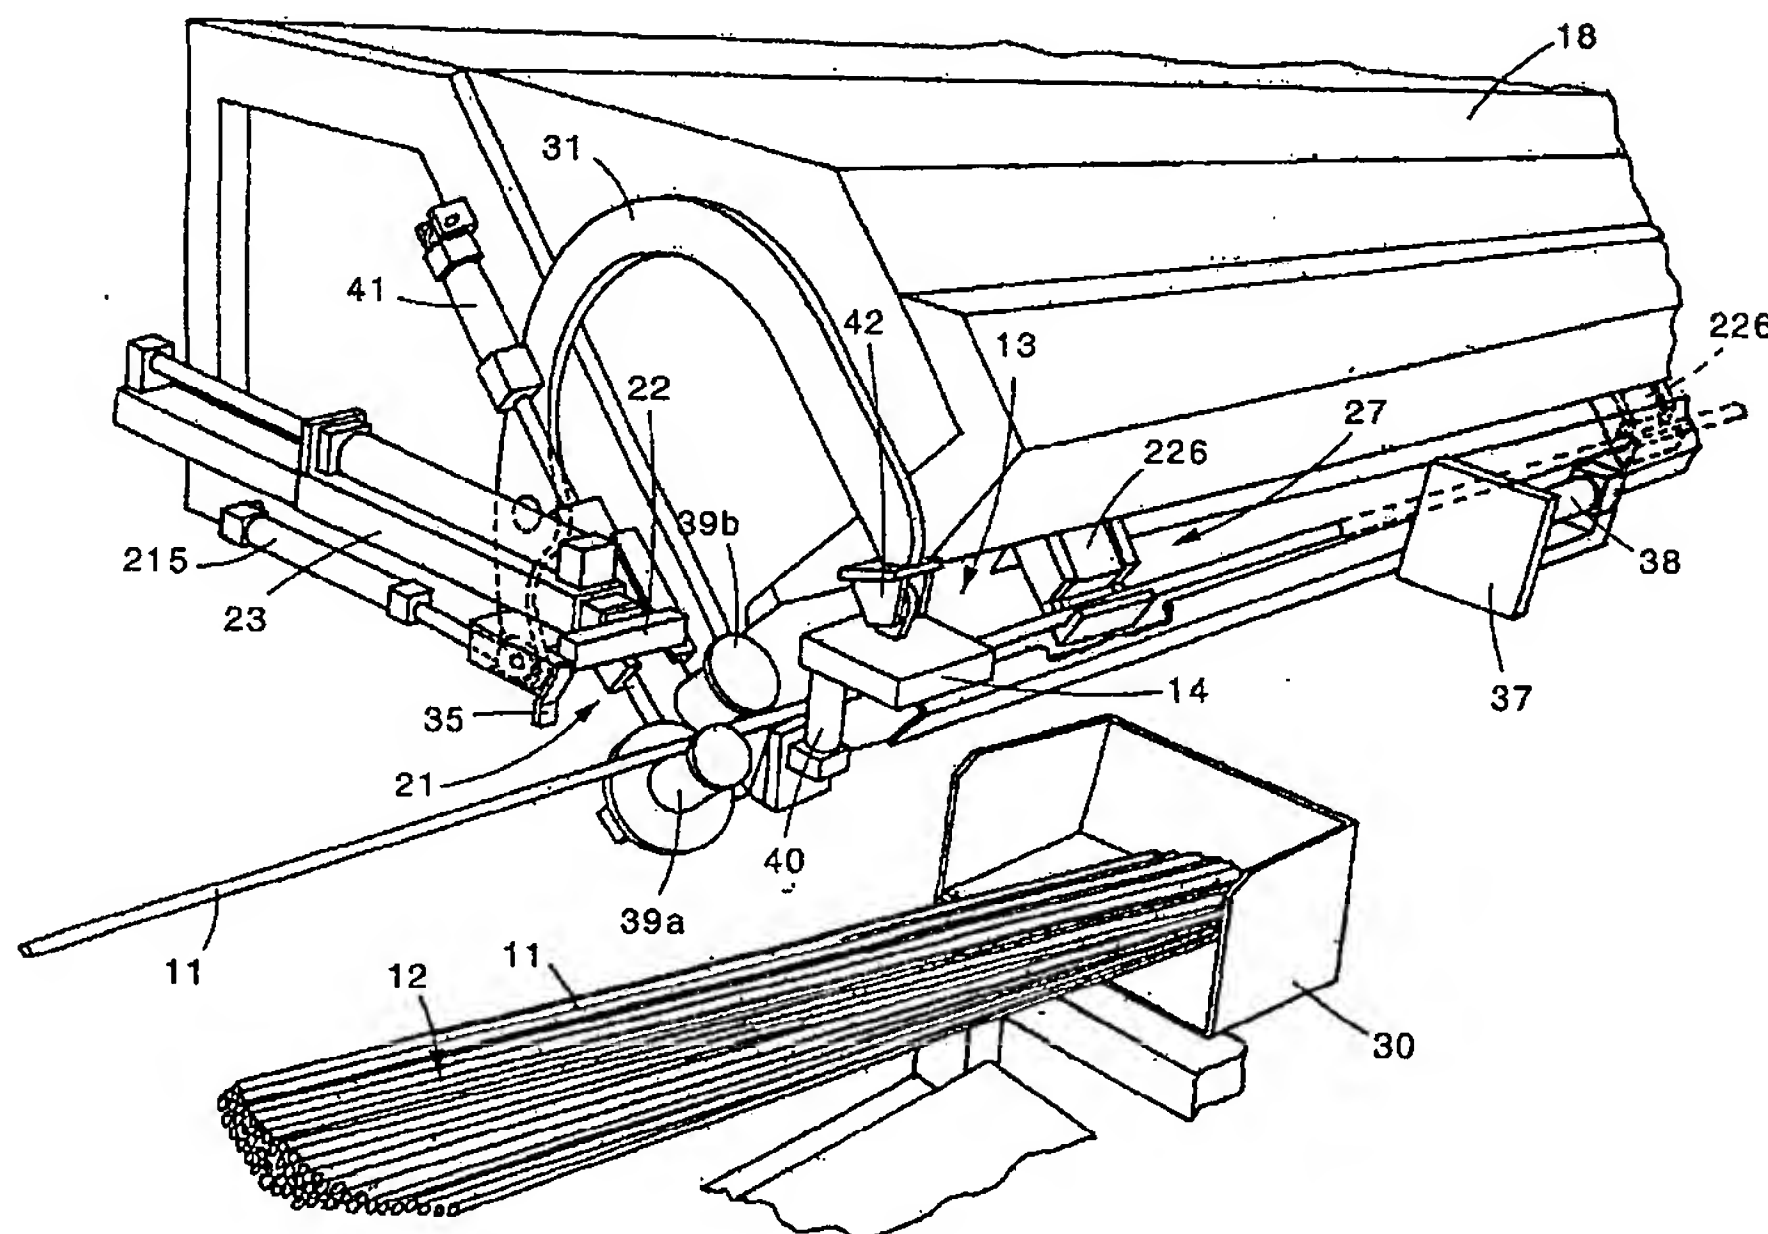

(57) Abstract: Device and method to pick up and remove from a bundle (12) one or more bars (11) in order to arrange them for use in an operating machine. The device comprises first magnetic means (13,113) to separate from the bundle (12) an end segment of a plurality of bars (11) and to arrange at least the end segments of plurality bars (11) on a plane distanced with respect to the bundle (12). The device comprises second magnetic means (21,121) to pick up, from the first magnetic means (13,113), at least one bar (11) at a time from the plurality of bars (11) and to unload the at least one bar (11) in a desired release position.



WO 2005/080021 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.